



Ceramic tile laying jobs may sometimes be quite delicate with problems which differ from standard applications such as linear wall tiling. Stairs, for instance, to be covered with the same tiles as the floor may require non standard spacing to match different heights from step to connecting floor for example.

The **STAIRTEC** product range is conceived to face these adjustment problems by featuring valid and lasting technical solutions. Illustrated scale dimension 1:1

stairtec ™ FSF

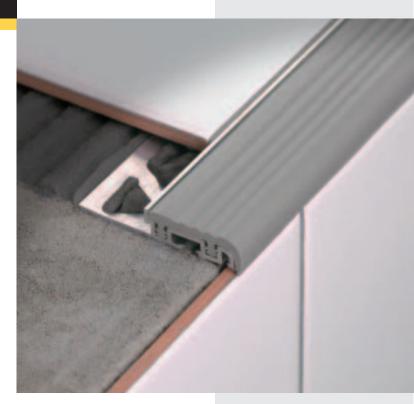



STAIRTEC FSF-A* Aluminium + Synthetic insert width 30 mm

Base profile in aluminium with an anti-slip synthetic insert strip already mounted which can be replaced in case of damage or wear. End caps FST available for each height 8 /10 / 12,5 mm.

Material: Extruded Natural Aluminium	
Synthetic Resinflex insert	
Length: 2,70 metres	
Width: 30 mm	
Colours*: grey, beige, black, yellow	

H=mm	Art.	Colour
8	FSF 80 A*	23 / 32 / 51 / 53
10	FSF 100 A*	23 / 32 / 51 / 53
12,5	FSF 125 A*	23 / 32 / 51 / 53

